
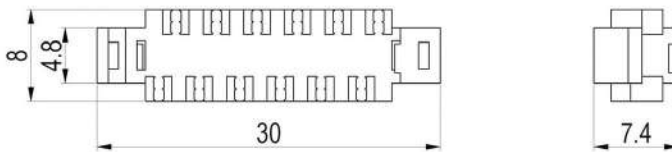


PATCH PANEL ACCESSORIES

Pigtail strain relief (=0,9 mm)

PSR-01

Pigtail strain relief (=0,9 mm) is mounted at entrance to ZK-06 and it enables optimally tight fixation of maximum 12 pigtails.
Material: ABS plastic, black colour

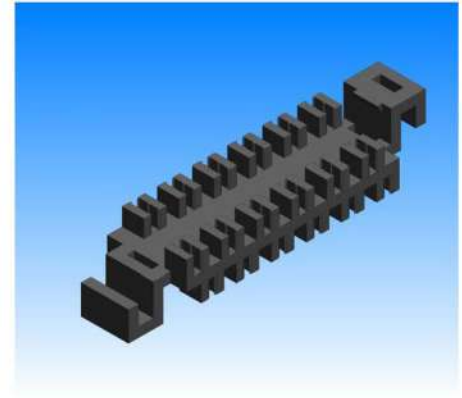

Splice protection


Splice protection is used to strengthen optical fiber without primary protection before and after the splice.

MCŠZ-T2



Type 1: Crimp block protection, length 40 mm

TKŠZ-T1

Type 2: Heat shrink splice protection, dimension after shrinking =2,5x 41 mm

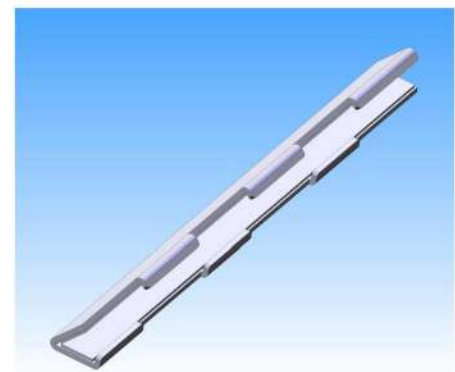

MCŠZ-T2

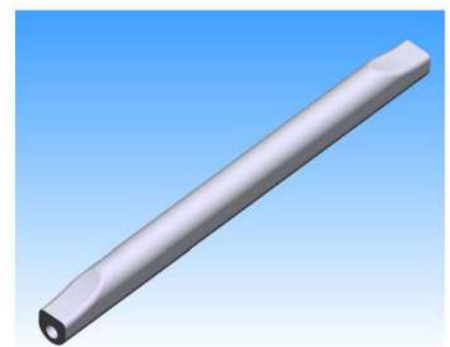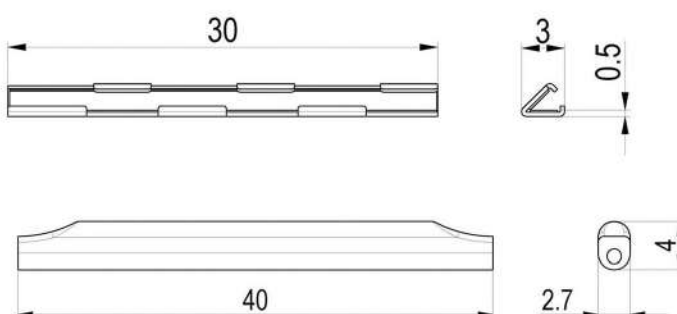

MCŠZ-T1